

SPRAY METHOD

SPRAY
SLOWLY

1 COAT = 135 ml/m² (0.42 fl oz/ft²)
3 COATS = 400 ml/m² (1.25 fl oz/ft²)



Use only washed and
dry stones



Warm and dry weather
should be expected for
the coming 3 days



Use in the absence of
rain with temperatures
above 7°C (44°F)

EASIHOLD



WATER BASED



NON-TOXIC



NOT HARMFUL



VIDEO

JARDINAT®

DAY ONE

1 - PREPARATION



5L
(1.3 gal)

Shake the bottle and
pour EASIHOLD into the
sprayer. It is recommended to
use a airless sprayer.



800ml
(0.21 gal)

Shake the bottle and
make sure the nozzle is
set correctly.

2 - FIRST COAT



Apply the first coat to the
clean dry surface,
spraying slowly and in a
controlled manner,
ensuring even coverage.

3 - RAKE



After applying the first
coat, rake or move the
rocks to expose the
uncoated material. This
ensures that the surface
is sufficiently covered
with EASIHOLD.

4 - SECOND COAT




For the second coat,
follow the same method
as in phase 2. Once
uniform coverage is
achieved, compact the
surface to obtain the
best adhesion result.

24h

DAY TWO

5 - THIRD COAT

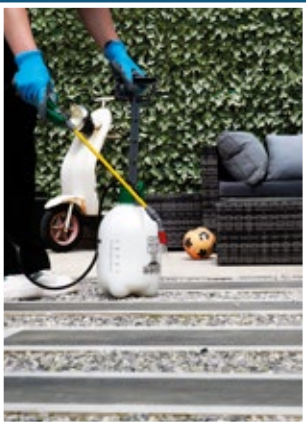

Once the first two coats
are dry, apply the third
and final coat to the
surface. Allow to dry and
if necessary, repeat the
application for greater
hold.

24h


LEAVE TO DRY FOR 24 HOURS

LEAVE TO DRY FOR 24 HOURS

24h

24h

INTENDED USE




Decorative
use



Pedestrian
traffic



Driveways



Underneath
Furniture

RECOMMENDATIONS

LAYER THICKNESS	BEST RESULT	GOOD RESULT	NOT RECOMMENDED
<8 mm (0.31")			
8-12 mm (0.31"-0.47")			
13-20 mm (0.47"-0.78")			
21-24 mm (0.78"-0.94")			
>24 mm (0.94")			
AGGREGATE DIMENSIONS	BEST RESULT	GOOD RESULT	NOT RECOMMENDED
<3 mm (0.11")			
3-5 mm (0.11"-0.19")			
5-8 mm (0.19"-0.31")			
8-18 mm (0.31"-0.70")			
>18 mm (0.70")			


MIXING METHOD

1 - MIX



Pour EASIHOLD into a mixing bucket with the rocks at a ratio of 1:25 by volume. Mix until all the material is evenly covered.

2 - POUR

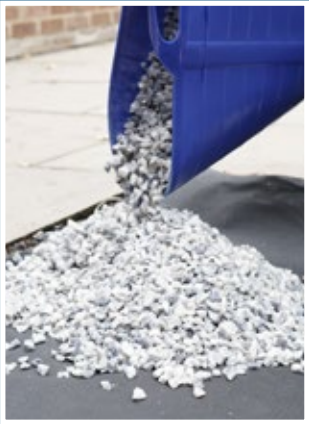

Pour the mixed material into the desired area. Make sure the area is permeable for complete drainage.

3 - COMPACT



Compact the stones. A flattened and compacted surface will produce the best results.

EXAMPLE: Each 5L/1.3 gal (5kg/11 lbs) of EASIHOLD allows you to mix approximately 125L/33 gal (188kg/415 lbs) of stones.

INTENDED USE




Pedestrian traffic



Decorative use



Driveways



Underneath furniture

24h

LEAVE TO DRY FOR 24 HOURS

24h



Use only washed and dry stones



Warm and dry weather should be expected for the coming 3 days



Use in the absence of rain with temperatures above 7°C (44°F)

RECOMMENDATIONS

LAYER THICKNESS	BEST RESULT	GOOD RESULT	NOT RECOMMENDED
<8 mm (0.31")			
8-12 mm (0.31"-0.47")			
13-20 mm (0.47"-0.78")			
21-24 mm (0.78"-0.94")			
>24 mm (0.94")			
AGGREGATE DIMENSIONS	BEST RESULT	GOOD RESULT	NOT RECOMMENDED
<3 mm (0.11")			
3-5 mm (0.11"-0.19")			
5-8 mm (0.19"-0.31")			
8-18 mm (0.31"-0.70")			
>18 mm (0.70")			

EASIHOLD



WATER BASED



NON-TOXIC



NOT HARMFUL



VIDEO

JARDINAT®

METHODE SPRAY

PULVÉRISER
LENTEMENT

1 chouche= 135 ml/m²
3 couches= 400 ml/m²



Utilisez uniquement
des pierres
lavées et séchées



Garantie 3 jours
d'un climat chaud et sec
après l'installation



Utiliser en l'absence de
pluie et températures
au-dessus de 7°C

PREMIER JOUR

1 - SECOUER ET PRÉPARER

2 - PREMIÈRE COUCHE

3 - RÂTISSAGE

4 - DEUXIEME COUCHE



5L

Agitez bien le flacon et
versez EASIHOLD dans le
pulvérisateur.
Nous recommandons
d'utiliser un
pulvérisateur sans
pré-mélange d'air
(Airless).



800ml

Agitez bien le flacon et
assurez-vous que la
buse est correctement
réglée



Appliquez la première
couche sur la surface
propre et sèche, en
pulvérisant lentement et
de manière contrôlée, en
assurant une couverture
uniforme.



Après avoir appliqué la
première couche, ratissez
ou déplacez les roches pour
exposer le matériau non
recouvert. Cela garantit
que la surface est
suffisamment couverte par
EASIHOLD.



Pour la deuxième couche,
suivre la même méthode
que la phase 2. Une fois la
couverture uniforme
obtenue, compacter la
surface pour obtenir le
meilleur résultat
d'adhérence.

24h


LAISSER SÉCHER 24 HEURES

24h

DEUXIÈME JOUR

5 - TROISIÈME COUCHE

24h

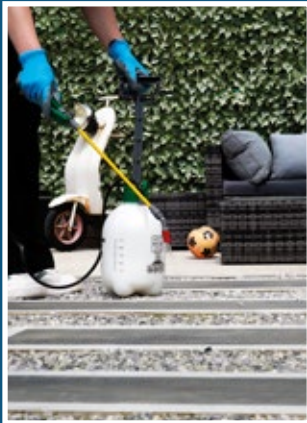

Une fois les deux premières
couches sont sèches,
appliquez la troisième et
dernière couche de finition
sur la surface. Laisser
sécher et si besoin répéter
l'application pour une
meilleure tenue


24h

LAISSER SÉCHER 24 HEURES

RECOMMANDATIONS

ÉPAISSEUR COUCHE	MEILLEUR RÉSULTAT	BON RESULTAT	PAS RECOMMANDÉ
<8 mm			
8-12 mm			
13-20 mm			
21-24 mm			
>24 mm			
ÉPAISSEUR COUCHE	MEILLEUR RÉSULTAT	BON RESULTAT	PAS RECOMMANDÉ
<3 mm			
3-5 mm			
5-8 mm			
8-18 mm			
>18 mm			

VORGESEHENE VERWENDUNG




Utilisation
décorative



Circulation
piétonne



Zones de
véhicules



Sous les
meubles

EASIHOLD



À BASE D'EAU



NON TOXIQUE



PAS NOCIF



VIDEO

JARDINAT®

MÉTHODE DE MÉLANGE

PREMIER JOUR

1 - MÉLANGER



Versez EASIHOLD dans un seau mélangeur avec des pierres dans un rapport de 1:25 en volume. Mélanger jusqu'à ce que tout le matériau soit uniformément couvert.

2 - VERSER



Versez le matériel mélangé dans la zone souhaitée. Assurez-vous que la zone est perméable pour un drainage complet.

3 - COMPACTER



Compactez les pierres ou le paillis. Une surface aplatie et compactée produira les meilleurs résultats.

EXEMPLE:
Chaque 5L (5kg)
d'EASIHOLD permet de
mélanger environ 125L
(188kg) de pierres.

DESTINATIONS D'UTILISATION



Circulation piétonne



Utilisation décorative



Zones de véhicules



Sous les meubles

24h

LAISSER SÉCHER 24 HEURES

24h



Utilisez uniquement
des pierres
lavées et séchées



Garantie 3 jours
d'un climat chaud et sec
après l'installation



Utiliser en l'absence de
pluie et températures
au-dessus de 7°C

RECOMMANDATIONS

ÉPAISSEUR COUCHE	MEILLEUR RÉSULTAT	BON RESULTAT	PAS RECOMMANDÉ
<8 mm			
8-12 mm			
13-20 mm			
21-24 mm			
>24 mm			

ÉPAISSEUR COUCHE	MEILLEUR RÉSULTAT	BON RESULTAT	PAS RECOMMANDÉ
<3 mm			
3-5 mm			
5-8 mm			
8-18 mm			
>18 mm			

EASIHOLD



À BASE D'EAU



NON TOXIQUE



PAS NOCIF



VIDEO

JARDINAT®